



		M			SZT	MM	MM	KM	KG
2670	GAL-C 2,5	2,50	-	rubber	20	900	ø 560	80	1208
2600	GAL-C 3,0	3,00	-	rubber	24	900	ø 560	100	1314
2635	GAL-C 3,5	3,50	-	rubber	28	900	ø 560	120	1495
2605	GAL-C 4,0	4,00	-	rubber	32	900	ø 560	140	1849
2610	GAL-C 4,0 H	4,00	+	rubber	32	1000	ø 560	160	2215
2615	GAL-C 4,5 H	4,50	+	rubber	36	1000	ø 560	170	2395
2620	GAL-C 5,0 H	5,00	+	rubber	40	1000	ø 560	180	2586
2630	GAL-C 6,0 H	6,00	+	rubber	48	1000	ø 560	200	2923

OPTIONAL EQUIPMENT

- Transport chassis
- Bolted disc hubs (set)
- Disc D= 610/5 mm (set)
- Thick Disc D= 610/6 mm (set)
- Disc RZ D=560/5 mm or 610/5 mm (set)
- Shallow Disc D= 560/5 mm (set)
- Shallow Disc D= 610/5 mm (set)
- Stone protection plate (set)
- Tubular roller D=540 mm or D=620 mm
- T-ring roller D= 600 mm
- V-ring roller D= 600 mm
- V-ring roller with paddles D= 600 mm
- C-ring roller D= 600 mm
- C-ring Tandem roller D= 600 mm
- C-ring Tandem HD roller D= 600 mm
- Spring roller D= 560 mm
- Packer roller D= 600 mm
- Rubber roller D= 500 mm
- Disc roller D= 600 mm
- Tine cultivator in front of roller (BPPW)
- Tine cultivator behind roller (BPZW)
- Middle solid screen (ES)
- Middle tine screen (EA)
- Support wheels 10/80-12" (set)
- LED lights
- Hydraulic working depth adjustment (HRGP)

**TUBULAR ROLLER
D=540MM OR D=620MM**

Recommended for light and medium soil

**C-RING ROLLER D=600 MM**

Recommended for medium and heavy soil. Offering soil-to-soil action. Creates grooves on a field's surface – good for water penetration.

**RUBBER ROLLER D=500 MM**

Good for a reduced tillage operations. Great soil compression due to large pressing area.

SPRING ROLLER D=560 MM

Each roller ring is built of 4 independent springs, thanks to which the wheels fall into a characteristic vibration, which ensures better compaction and leveling of the ground even in difficult cultivation conditions

**V-RING ROLLER D=600 MM**

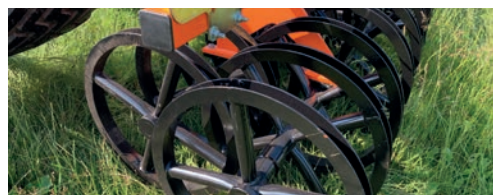
Recommended for medium and heavy soil. Good crumbling and pressing action. Creates grooves on a field's surface – good for water penetration.

**PACKER ROLLER D=600 MM**

Recommended for medium and heavy soil. Exceptional crumbling and pressing action. Very aggressive, ideal for pre-sowing cultivation.

T-RING ROLLER D=600 MM

A ring roller recommended for heavy, stony and lumpy soil. It offers a perfect crumbling of the surface, while leaving grooves on a field's surface.

**C-RING TANDEM HD ROLLER
D=600 MM**

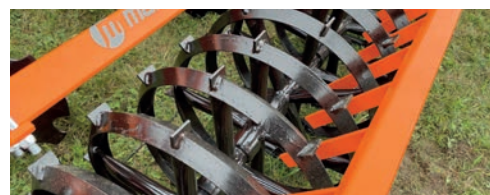
Standard C-ring rims welded to the oversized axle design for additional toughness. Recommended for toughest conditions.

**DISC ROLLER D=600 MM**

This roller is designed for heavy conditions. Due to heavy weight roller presses crop residues into the soil, and covers those with earth, while leveling the ground at the same time.

C-RING TANDEM ROLLER D=600 MM

Recommended for medium and heavy soil. Offering soil-to-soil action. Creates grooves on a field's surface – good for water penetration. Due to large contact area, it is offering exceptional working depth control when aggregated with a large and heavy machines.

**V-RING ROLLER WITH PADDLES D=600 MM**

Recommended for medium and heavy soil. Good crumbling and pressing action. Creates grooves on a field's surface – good for water penetration. Additional paddles provide some extra crushing action.

Disc harrow GAL-C

**Disc harrow GAL-C**

GAL-C compact disc harrows with two rows of 560mm boron steel notched discs mounted on maintenance free fully sealed bearing hubs. Working units mounted to the frame by means of rubber suspension rollers. Many optional accessories available as variety of rollers, scrapers, screens and more.


mandam.com.pl/en/disk-harrow-gal-c

Mandam Sp. z o.o.
 Poland
 44-100 Gliwice,
 ul. Toruńska 14
 0048 32 232 26 60
mandam.com.pl

[mandam.official](https://www.mandam.com.pl)


MIDDLE SOLID SCREEN (ES) (OPTION)

DISC INCLINATION ANGLE 20/12 DEGREES

V-RING ROLLER D=600 MM (OPTION)

RUBBER DAMPERS

NOTCHED DISCS 560 MM

5- YEAR WARRANTY
MAINTENANCE FREE HUB

STANDARD EQUIPMENT

- Rubber dampers D=45 mm
- Notched discs 560mm
- Side screens with rubber damping
- 5- year warranty maintenance free hub

GAL-C 4,0 H