

Cultivator

SUPER



The SUPER cultivator is dedicated to shallow cultivation. It works very well when mixing crop residues at a maximum depth of up to 15 cm. Spring tines 70×12 arranged in 4 rows with the possibility of using different working coulters ensure effective undercutting, loosening and even distribution of residues. Additionally, the possibility of using a tine screen in front of the roller ensures leveling of the field after passing the unit. A variety of working rollers, to choose from the palette of proposed ones, provides convenience of their adjustment to different soil classes.

STANDARD EQUIPMENT: four rows of spring tines 70x12; straight coulters; hydraulic adjustment of working depth; hydraulic locking of HBS cylinders

OPTIONS: 200 mm sweeps; forged coulters with carbides; tillage rollers; tine screen; LED lighting













Cultivator

SUPER

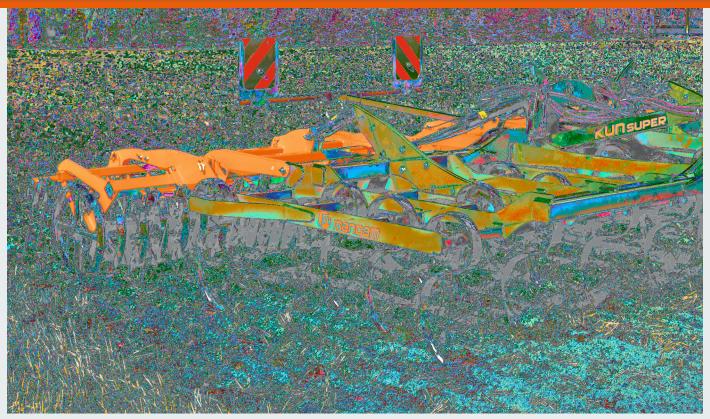







SUPER			9	8	
	m		#	HP	kg
SUPER 3,0	3,0	- /	19	80	735
SUPER 4,0 H	4,0	+	25	100	1556
SUPER 5,0 H	5,0	+	31	120	1730
SUPER 6,0 H	6,0	+	37	140	1972

